


Item No.	
Project	
•	
Quantity	

Model: 130F

Electric, Counter Top Fryer



Model 130F

PERFORMANCE GUIDE

Power Input	12-kW
Fat Capacity	30 lbs.
Preheat Time [350°F]	7 minutes
Frozen Fries Production	68 lbs./hr

SHORT/BID SPECIFICATION

Fryer shall be a **LANG Manufacturing Model 130F**, a 15" wide counter top electric heated unit with 12-kW power input; 30 pound shortening capacity and 68 lbs/hr frozen fries production capacity; twin half size baskets with manual basket lifts; all stainless steel tank and exterior; plus the features listed and options/accessories checked:

STANDARD PRODUCT WARRANTY

- One year, parts & labor
- Fry pot is guaranteed to <u>never</u> leak.

CONSTRUCTION FEATURES

- One piece heavy duty 430 Series stainless steel exterior, with attractive No. 4 finish
- · Stainless steel fry kettle
- 12-kW [total] rod type low watt density heating elements
- · Twin frying baskets with manual basket lift system
- Front mounted oil drain ball valve

PERFORMANCE FEATURES

- · High production from a 15" wide counter top unit
- Kettle and element design provide a large cool zone where food particles can collect
- Low watt density heating elements provide even heating and extend shortening life
- · Heating elements hinge up and out of kettle for easy cleaning
- · All service is done from front, without moving the unit

CONTROL PACKAGE

- Power ON-OFF switch
- Thermostat
- · POWER, HEAT & OVER TEMP indicator lights





Model: 130F

INSTALLATION REQUIREMENTS


- E Single 208V or 240V, 3-phase or optional 480V, 3-Phase electrical connection
- Installation under approved vent hood required. Consult local codes.

 [Power connection from rear or bottom. See below]

OPTIONS & ACCESSORIES

- ☐ Full-size basket
- ☐ Half-size basket [two provided]
- Quick disconnect grease drain pipe

- ☐ 480 Volt, 3-phase model
- 4" adjustable legs

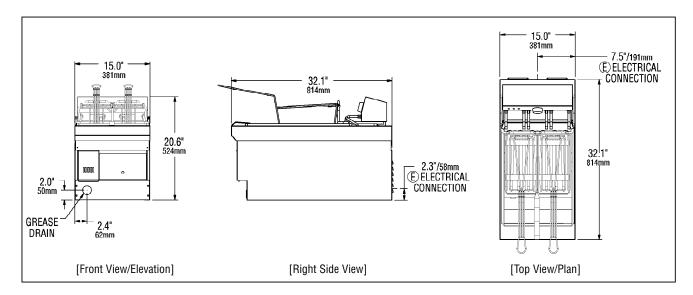

Model	Height x Width x Depth	Clearance from combustible surface	Weight		Freight
Wodel			Actual	Shipping	Class
130F	20.6" x 15.0" x 32.1" 524mm x 381mm x 814mm	Sides: 0" Back: 0"	100 lbs.	115 lbs. 52 kg	85
	32411111 X 301111111 X 014111111	Dack. U	45 kg	oz ky	

Model	(E) Electrical Requirements					
	Voltage	Total kW	Phase	Amps/Line		
130F	208V/60Hz	12.0	3	33.3		
	240V/60Hz	12.0	3	28.9		
	480V/60Hz	12.0	3	14.4		

CAD SYMBOLS & PRICING



Due to continuous improvements, specifications subject to change without notice.



Sheet No. LSP-F1 (rev. 06/07)

© 2003 Lang Manufacturing Company Printed in U.S.A. 9/03-M-12161