



Item No. \_\_\_\_\_  
 Project \_\_\_\_\_  
 Quantity \_\_\_\_\_

**Electric, Quarter-Size Convection Oven**

**Model: ECOQ-AP**



*Model ECOQ-A shown*

**PAN CAPACITY GUIDE**

Pan Type	Rack Positions	Optimum
13" X 9" Quarter-Sheet	6	3
12" X 10" Half-Hotel*	-	3

\* 2-1/2" deep pans

**SHORT/BID SPECIFICATION**

Convection Oven shall be a **LANG Manufacturing Model ECOQA** [AP=Accu-Plus] Control Package, 19" wide, 3/3.9-kW electric heated 3-pan quarter-size unit, with: heavy duty door with large viewing/merchandising window; stainless and aluminized steel exterior and stainless steel interior cooking compartment; rear mounted blower with pulse control; compartment inspection light and three pan racks standard; plus a "lifetime" warranty on the door mechanism. Includes all the features listed and options/accessories checked:

**STANDARD PRODUCT WARRANTY**

- One year, parts & labor, plus
- Lifetime warranty on the oven door mechanism

**CONSTRUCTION FEATURES**

- Heavy duty 430 Series stainless steel exterior, with attractive No. 4 finish
- Fully enclosed aluminized steel oven back
- Cooking compartment is 430 Series stainless steel with high-temp insulation
- Heavy duty door, with large double pane tempered glass window
- Powerful blower centered in back of compartment
- Chrome steel 6-position pan slides with three chrome plated wire racks provided

**PERFORMANCE FEATURES**

- 150 to 450°F operating temperature range
- Solid state temperature control accurate to ± 4°F
- Compact 19" width for tight kitchens or small kiosk installations
- Large viewing window for merchandising fresh-baked product
- Pulse fan capability
- Door interlock switch cuts power to fan
- Choice of two control packages [See below]

**CONTROL PACKAGE**

**Accu-Plus Controls [-AP]**

- Simple knob-set time and temperature controls
- 1-hour timer with non-stop buzzer
- Pulse-fan switch
- Power-ON switch



Sheet No. LSP-C10 (rev. 03/12)

# Electric, Quarter-Size Convection Oven


# Model: ECOQ-AP

## INSTALLATION REQUIREMENTS

- ⓔ 208V or 240V 1-Phase power ONLY
- Installation under approved vent hood may be required. Consult local codes.
- 48" power cord with NEMA 6-20 plug provided as std. [Power connection from back. See below]

## OPTIONS & ACCESSORIES

- 4" legs with adjustable bullet feet
- Extra wire pan racks [3 provided as std.]
- Set of six [6] special 1/4 size bake pans

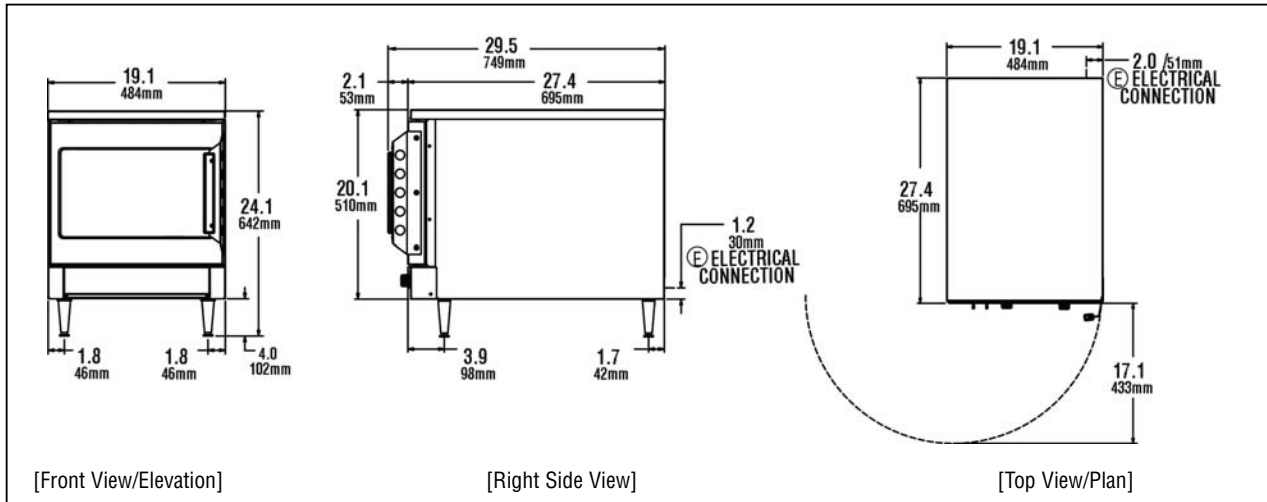

Model	Height x Width x Depth (without optional legs)	Clearance from combustible surface	Weight		Freight Class
			Actual	Shipping	
ECOQ-AP	20.1" x 19.1" x 29.5" 511mm x 484mm x 750mm	Sides: 6" (153mm) Back: 6" (153mm) Floor: 6" (153mm)	110 lbs. 50 kg	150 lbs. 68 kg	85

Model	ⓔ Electrical Requirements			
	Voltage	Total kW	Phase	Amps/Line
ECOQ-AP	208V/60Hz	3.0	1	14.4
	240V/60Hz	3.9	1	16.3

## CAD SYMBOLS & PRICING



Due to continuous improvements, specifications subject to change without notice.



Sheet No. LSP-C10 (rev. 03/12)

LANG MANUFACTURING • 10 SUNNEN DR. ST. LOUIS, MO 63143  
PHONE: 314-678-6315 • FAX: 314-781-3636 • www.langworld.com